



PREMIUM-WERKZEUGE



PREMIUM TOOLS



PNEUMATIC TOOLS

REVERSIBLE RATCHET



06

GRINDING MACHINES



10 - 11

DIE & ANGLE DRILLING MACHINES



06

BELT SANDER



11

SPOT WELD DRILLING MACHINES



07

RANDOM ORBIT SANDERS



12

HAMMERING TOOLS



07

MULTIGRINDER



13

PIN & DIE GRINDERS



08 - 09

ERASER



13

LONG-DISC CUTTER



17 - 18

BURNISHER



14 - 15

CHISEL HAMMER



19 - 21

NEEDLE SCALER



15

CLAMP SCREWS EJECTOR



20

COMPRESSED AIR TOOLS



16

TOOLS FOR EXHAUST SENSORS



20

IMPACT WRENCHES



22 - 26

IMPACT WRENCHES



22 - 26

RIVETING TOOLS PISTOL



27

VACUUMS



30

GREASE GUN



27 - 28

PNEUMATIC CLEANING GUNS



31 - 33

PRESSURISED AIR PISTOL CARTRIDGES



28

INTERNAL CLEANING



31

AIR BLOW OUT TOOLS



29 - 30

SPRAY GUNS



31

PNEUMATIC FLUSH GUN



32

BRAKE PISTON RESET TOOL



35

WHEEL FILLING GAUGE



32 - 33

AIR HOSE



36

PNEUMATIC VIBRO-EXTRACTOR



34

AIR SERVICE UNIT



37

PNEUMATIC ADAPTERS & COUPLINGS



38 - 41

AXLE BOOTS ASSEMBLY DEVICES



34

OILS & GREASES



41


REVERSIBLE RATCHET

SLIMPOWER MINI-PNEUMATIC REVERSING RATCHET

- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Stepless speed regulation
- Vibration dampened
- Very compact construction

Technical data:

Max. tightening torque:	30 Nm
Max. loosening torque:	30 Nm
No load current:	300 r.p.m.
Vibration acceleration:	< 4,3 m/s ²
Noise performance level:	98,1 dbA
Noise pressure level:	87,1 dbA
Recommended torque:	25 Nm
Air consumption:	240 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



SLIMPOWER

	Square drive	B mm	L mm	Weight	Price
515.5505	1/4"	35,5	135,0	400	€ 118, ⁹⁰
515.5510	3/8"	35,5	135,0	400	€ 118, ⁹⁰
515.5515	1/2"	35,5	135,0	400	€ 133, ⁹⁰



MONSTER HIGH-PERFORMANCE PNEUMATIC REVERSING RATCHET

- recoilless, gentle on wrists
- With ratchet head reversing lever (clockwise and anticlockwise)
- Ultra light robust housing special plastic
- Number of revolutions adjustable through regulating screw

Technical data:

Max. tightening torque:	81 Nm
Max. loosening torque:	81 Nm
No load current:	300 r.p.m.
Vibration acceleration:	< 4,51 m/s ²
Noise performance level:	103,6 dbA
Noise pressure level:	92,6 dbA
Air consumption:	60,3 l/min
Recommended torque:	60 Nm
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT





	Square drive	B mm	L mm	Weight	Price
515.3825	3/8"	50,0	340,0	1,42	€ 200, ⁵⁰
515.1185	1/2"	50,0	340,0	1,44	€ 200, ⁵⁰

DIE & ANGLE DRILLING MACHINES

SLIMPOWER MINI-PNEUMATIC STRAIGHT DRILL

- Straight design
- With quick-action drill chuck clamping width 0,6 - 6,0mm
- For hard to reach places
- Ideally suited for car bodywork and industrial working
- Stepless speed regulation

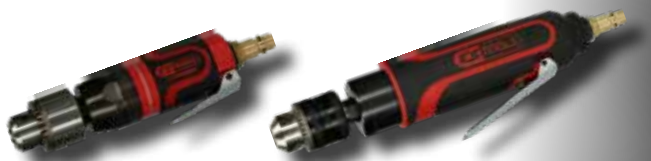

SLIMPOWER


Technical data:

	515.5520	515.5435
Chuck capacity:	0,6 - 6	1 - 10
Chuck thread reception:	3/8" x 24 UNF	3/8" x 24 UNF
Capacity:	186 Watt	370 Watt
No load current:	7000 r.p.m.	4000 r.p.m.
Vibration acceleration:	< 3,3 m/s ²	< 2,8 m/s ²
Noise performance level:	97,4 dbA	101,7 dbA
Noise pressure level:	86,4 dbA	90,7 dbA
Air consumption:	240 l/min	350 l/min
Min. tube diameter:	3/8" - 10 mm	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT	1/4"NPT

	B mm	L mm	Weight	Price
515.5520	35,5	145,0	400	€ 133, ⁹⁰
515.5435	46,0	225,0	900	€ 133, ⁹⁰

SLIMPOWER MINI-PNEUMATIC ANGLE DRILL

- With gear rim drill chuck – span width 1 – 6,5mm
- For hard to reach places
- Ideally suited for car body work
- Stepless speed regulation
- Vibration dampened through double bearing guides



SLIMPOWER

Technical data:

	515.5525	515.5465
Chuck capacity:	0,6 - 6	1 - 10
Chuck thread reception:	3/8" x 24 UNF	3/8" x 24 UNF
Capacity:	186 Watt	370 Watt
No load current:	5000 r.p.m.	1900 r.p.m.
Vibration acceleration:	< 6,6 m/s ²	< 3,5 m/s ²
Noise performance level:	99,3 dbA	101,9 dbA
Noise pressure level:	88,3 dbA	90,9 dbA
Air consumption:	240 l/min	350 l/min
Min. tube diameter:	3/8" - 10 mm	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT	1/4"NPT

	B mm	L mm	Weight	Price
515.5525	90,0	145,0	700	€ 133, ⁹⁰
515.5465	115,0	205,0	1070	€ 133, ⁹⁰

SPOT WELD DRILLING MACHINES

FASTDRILL PNEUMATIC SPOT WELD DRILL SET

- Special drive for high torque
- Suitable for continuous duty
- Ideally suited for internal and external spot welds
- For carbide spot weld drills
- Very substantial guide

3
pcs



630,50 €

Technical data:

Drive in mm	8 mm
Capacity:	280 Watt
No load current:	1000 r.p.m.
Vibration acceleration:	< 0,72 m/s ²
Noise performance level:	95,4 dbA
Noise pressure level:	82,4 dbA
Air consumption:	340 l/min
Operating pressure:	6 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



515.1310

3 pcs

2,40

PNEUMATIC SMART-REPAIR DENT PULLER SET

- Suitable for repairing small dents or bumps
- No filling or painting work
- Allows the flexible removal of the dent and provides the best results
- Includes pneumatic dent puller
- With 10 different beating pads

12
pcs



399,50 €



140.2520

12 pcs

1,48

HAMMERING TOOLS

PNEUMATIC VACUUM DENT PULLER SET

- Ideal for processing bumps in bodywork
- A vacuum creates an underpressure and the suction disks stick to the bodywork allowing dents to be easily pulled out
- Pneumatic regulation via ball valve
- Includes 3 exchangeable suction discs and 1 pull hook
- Special tool steel

5
pcs



223,90 €

Technical data:

Operating pressure:	6 - 8 bar
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"
Slide hammer weight:	1,2 kg
Removal power:	bis zu 100 Kg




140.2080

5 pcs

4,50

GLUEPADS FOR HAMMERING TOOLS

- Suitable for repairing small dents or bumps
- No filling or painting work
- Allows the flexible removal of the dent and provides the best results
- For use alongside a planishing tool

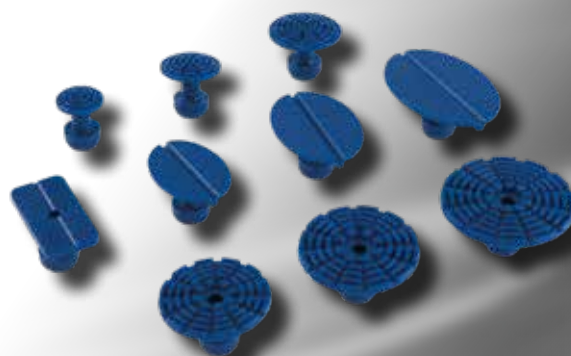

Pcs



140.2505	5	Gluepad, round, flat, Ø 40 mm, pack of 5	25	€ 11,90
140.2515	5	Gluepad, round, flat, Ø 35 mm, pack of 5	20	€ 11,90
140.2525	5	Gluepad, round, flat, Ø 32 mm	20	€ 11,90
140.2535	5	Gluepad, round / spherically Ø 25 mm, pack of 5	15	€ 11,90
140.2545	5	Gluepad, round / spherically Ø 20 mm, pack of 5	15	€ 11,90
140.2555	5	Gluepad, round / spherically Ø 15 mm, pack of 5	10	€ 11,90
140.2565	5	Gluepad, elliptical, flat, 48 x 33 mm, pack of 5	25	€ 11,90
140.2575	5	Gluepad, elliptical, flat, 40 x 27 mm, pack of 5	20	€ 11,90
140.2585	5	Gluepad, elliptical, flat, 33 x 17 mm, pack of 5	15	€ 11,90
140.2595	5	Gluepad, rectangular, 32 x 17 mm, pack of 5	15	€ 11,90

PIN & DIE GRINDERS

PNEUMATIC PENCIL GRINDER, 70.000 RPM


- Straight design
- Ideal for carbide, corundum and tungsten carbide burs
- For working in hard to access areas
- Very handy and compact construction
- Suitable for different repair works



211,⁹⁰ €

Technical data:

Hose length:	1 m
Tube diameter:	5 mm
Chuck capacity:	3 mm
Capacity:	150 KW
No load current:	70000 r.p.m.
Vibration acceleration:	< 0,80 m/s ²
Noise performance level:	86 dbA
Noise pressure level:	74 dbA
Air consumption:	140 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"PT



	D mm	L mm	
515.3198	16,0	132,0	330

SLIMPOWER MINI-PNEUMATIC DIE GRINDER, STRAIGHT

- Very compact construction
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- Stepless speed regulation
- For working in hard to access areas



79,⁵⁰ €

Technical data:

Chuck:	6 mm
Capacity:	220 Watt
No load current:	25000 r.p.m.
Vibration acceleration:	< 2,6 m/s ²
Noise performance level:	95,6 dbA
Noise pressure level:	84,6 dbA
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



	B mm	L mm	
515.5530	35,0	123,0	300

PNEUMATIC DIE GRINDER


- Vibration dampened
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Very handy and compact construction



66,⁵⁰ €

Technical data:

Chuck:	6 mm
Capacity:	370 Watt
No load current:	23000 r.p.m.
Vibration acceleration:	< 2,0 m/s ²
Noise performance level:	101,1 dbA
Noise pressure level:	90,1 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



	B mm	L mm	
515.5410	45,0	188,0	620

LONG SHAFT DIE GRINDER


- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in deep lying areas
- Stepless speed regulation
- Ultra light robust housing special plastic



145,⁵⁰ €

Technical data:

Chuck:	6 mm
Capacity:	370 Watt
No load current:	23000 r.p.m.
Vibration acceleration:	< 2,4 m/s ²
Noise performance level:	102,6 dbA
Noise pressure level:	91,6 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



	B mm	L mm	
515.5415	26,0	350,0	1150

SLIMPOWER MINI-PNEUMATIC ANGLED DIE GRINDER

- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Stepless speed regulation
- Very compact construction



Technical data:

Chuck: 6 mm
 Capacity: 220 Watt
 No load current: 19000 r.p.m.
 Vibration acceleration: < 3,5 m/s²
 Noise performance level: 97,9 dbA
 Noise pressure level: 86,9 dbA
 Air consumption: 283 l/min
 Operating pressure: max. 6,3 bar (90 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"NPT

118,90 €

slimPOWER

	B mm	L mm	Weight
515.5535	75,0	123,0	300

SLIMPOWER MINI-PNEUMATIC ANGLED DIE GRINDER

- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Stepless speed regulation
- Very compact construction



Technical data:

Chuck: 6 mm
 Capacity: 220 Watt
 No load current: 18000 r.p.m.
 Vibration acceleration: < 6,5 m/s²
 Noise performance level: 97,8 dbA
 Noise pressure level: 86,8 dbA
 Air consumption: 283 l/min
 Operating pressure: max. 6,3 bar (90 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"NPT

170,50 €

slimPOWER

	B mm	L mm	Weight
515.5540	70,0	270,0	700



133,90 €



	B mm	L mm	Weight
515.5420	85,0	200,0	780

PNEUMATIC ANGLED DIE GRINDER

- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For one handed operation with ergonomic design
- Ultra light robust housing special plastic
- For working in hard to access areas

Technical data:

Angle size: 80 mm
 Chuck: 6 mm
 Capacity: 370 Watt
 No load current: 18000 r.p.m.
 Vibration acceleration: < 4,4 m/s²
 Noise performance level: 101 dbA
 Noise pressure level: 90,0 dbA
 Air consumption: 350 l/min
 Operating pressure: max. 6,3 bar (90 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"NPT




ROD GRINDER ACCESSORIES

CLAMPING MANDREL

- High performances thin disks
- Special tool steel

20,50 €




	Shaft	profile	Weight
515.3017	6,0	round	72

REINFORCED GRINDING DISC

- For universal usage
- High level of flexibility
- Consistent high cutting power

Ideal for use in metal and stainless steel.




100,50 €

	Rpm max.	D1 mm	D2 mm	Height mm	Content	Weight
515.5058	22000	59,0	9,56	4,0	25	600

HIGH PERFORMANCES THIN CUTTING DISK

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced

Ideal for use in very thin materials until 2.5 mm, tool steel, sheet metal, thin walled pipes and profiles all type suited for locksmiths, car body building, sanitary and heating fitting, plumbing, sheet metal processing, carpentry, joinery, roofing, metal processing and all motor vehicles businesses.



	Rpm max.	D1 mm	D2 mm	Height mm	Content	Weight	Price
337.2005	13300	50,0	6,0	1,0	25	100	€ 35,50
515.5056	30600	50,0	10	1,1	50	650	€ 66,50
515.5057	20100	75,0	10	1,5	50	710	€ 106,90

GRINDING MACHINES

SLIMPOWER MINI-PNEUMATIC GRINDING MACHINE

- Angled design
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Very compact construction



163,90 €

Technical data:

Capacity:	220 Watt
No load current:	19000 r.p.m.
Sponge diameter:	50 + 75 mm
Polishing sponge diameter:	46 mm
Vibration acceleration:	< 3,5 m/s ²
Noise performance level:	96,8 dbA
Noise pressure level:	85,8 dbA
Air consumption:	283 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT



SLIMPOWER

	B mm	L mm	📦
515.5585	40,0	120,0	300

SLIMPOWER MINI-PNEUMATIC GRINDING MACHINE FOR SMALL PADS

- Angled design
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- For screw in pads with 26.7 mm diameter



133,90 €

Technical data:

No load current:	19000 r.p.m.
Vibration acceleration:	< 3,5 m/s ²
Noise performance level:	96,8 dbA
Noise pressure level:	85,8 dbA
Air consumption:	283 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT



SLIMPOWER

	B mm	L mm	📦
515.5570	65,0	120,0	300

GRINDING DISC

- With Velcro receiver
- With internal thread receiver



	∅ mm		Pcs	📦	€
515.5101	46,0	flexible	5	275	79,50
515.5102	75,0	flexible	5	125	79,50
515.5103	46,0	rigid	5	55	29,90

GRINDING PADS

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges



	∅ mm	Grit size	Pcs	📦	€
515.5119	50,0	320	10	16	16,50
515.5116	75,0	320	10	19	16,50
515.5118	50,0	400	10	16	16,50
515.5115	75,0	400	10	19	16,50
515.5117	50,0	600	10	16	16,50
515.5114	75,0	600	10	19	16,50

GRINDING PADS

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges
- With external thread receiver



	∅ mm	Grit size	Colour	Pcs	📦	€
515.5071	26,7	60	brown	10	10	9,90
515.5072	26,7	80	brown	10	20	16,50
515.5073	26,7	150	purple	10	20	18,50
515.5074	26,7	300	blue	10	20	18,50
515.5075	Strip Rad	26,7	black	10	25	16,50

SLIMPOWER MINI-PNEUMATIC GRINDING MACHINE FOR LARGE PADS


- Angled design
- Ideal for curved cutting
- For working in hard to access areas
- Stepless speed regulation
- For screw in pads with 50.0 mm diameter



145,⁵⁰ €

Technical data:

No load current:	19000 r.p.m.
Vibration acceleration:	< 3,5 m/s ²
Noise performance level:	96,8 dbA
Noise pressure level:	85,8 dbA
Air consumption:	283 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT



slimPOWER

	B mm	L mm	🔒
515.5580	70,0	120,0	300

BELT SANDER

PNEUMATIC BELT GRINDER


- Working head is 360° adjustable
- Adjustable for quick sanding belt change
- Ideal for narrow areas (10 mm belt width)
- Stepless speed regulation
- Light aluminium housing



170,⁵⁰ €

Technical data:


Belt speed:	1188 m/min
No load current:	18000 r.p.m.
Vibration acceleration:	< 1,01 m/s ²
Noise performance level:	81 dbA
Noise pressure level:	73 dbA
Air consumption:	142 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"PT



	L1 mm	L2 mm	🔒
515.3549	150,0	170,0	800

GRINDING PADS

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges
- With external thread receiver

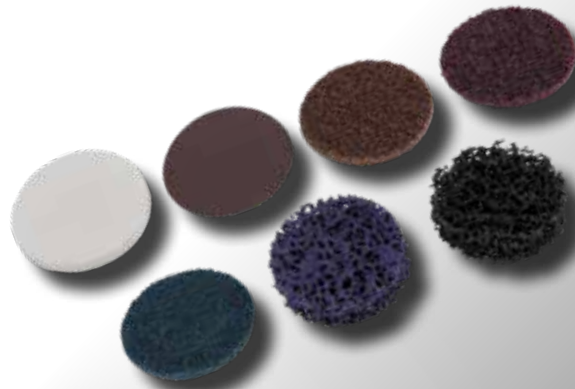


		Ø mm	Grit size	Colour	Pcs	🔒	
515.5081	Scouring wool	50,0		white	10	60	€ 24, ⁹⁰
515.5083	Sand paper	50,0	80	brown	10	60	€ 27, ⁹⁰
515.5084	Sand paper	50,0	150	purple	10	60	€ 27, ⁹⁰
515.5082	Sand paper	50,0	240	brown	10	30	€ 27, ⁹⁰
515.5085	Sand paper	50,0	300	blue	10	60	€ 27, ⁹⁰
515.5086	Strip Rad	50,0		purple	10	100	€ 82, ⁵⁰
515.5087	Strip Rad	50,0		black	10	100	€ 36, ⁵⁰



ABRASIVE BELTS FOR PNEUMATIC BELT GRINDERS

- Abrasive belts for pneumatic belt grinders 515.3549

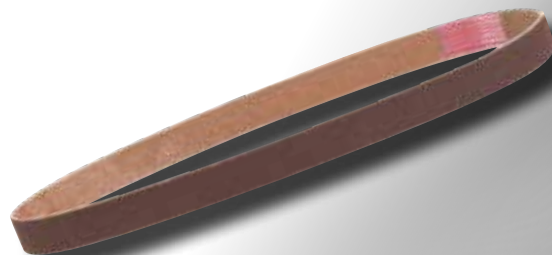

	Grit size	Length mm	Pcs	🔒	
515.3551	80	330	10	60	€ 27, ⁹⁰
515.3552	100	330	10	80	€ 27, ⁹⁰
515.3553	120	330	10	100	€ 27, ⁹⁰

RANDOM ORBIT SANDERS

MINI ORBIT SANDER

- For hard to reach places and improvement work
- Angled design
- For one hand operation
- Receiver: Internal thread
- Grinding disc with Velcro



114,50 €

Technical data:

Oscillating circuit:	2,5 mm
No load current:	15000 r.p.m.
Vibration acceleration:	< 0,77 m/s ²
Noise performance level:	94 dbA
Noise pressure level:	81 dbA
Air consumption:	113 l/min
Operating pressure:	max. 5,2 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"

	B mm	L mm	
515.5111	140,0	117,0	700

FINE-SANDING PNEUMATIC RANDOM ORBITAL SANDER WITH DUST EXTRACTION

- Compact construction height and light composite housing for controlled working
- For sanding or polishing
- Alternatively can be used with dust bag or industrial vacuum cleaner
- With 6 punched hole in pitch circle: 80 mm / Ø 11 mm
- Cold insulated handle



170,50 €


Technical data:

Oscillating circuit:	2,5 mm
Velcro disc receiver:	Ø 152,4 mm = 6"
Hose length:	2 m
Capacity:	240 Watt
No load current:	10000 r.p.m.
Vibration acceleration:	< 0,80 m/s ²
Noise performance level:	71 dbA
Noise pressure level:	60 dbA
Air consumption:	255 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	D mm	L mm	
515.3061	150,0	196,0	1,50

GRINDING PADS

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges

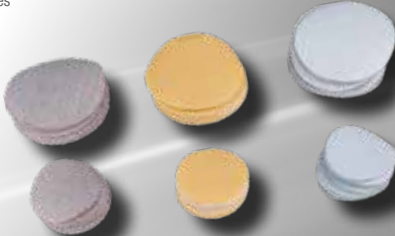

	Ø mm	Grit size	Pcs		
515.5119	50,0	320	10	16	€ 16,50
515.5116	75,0	320	10	19	€ 16,50
515.5118	50,0	400	10	16	€ 16,50
515.5115	75,0	400	10	19	€ 16,50
515.5117	50,0	600	10	16	€ 16,50
515.5114	75,0	600	10	19	€ 16,50

GRINDING DISC

- With Velcro receiver
- With external thread receiver



	Ø mm	Content		
515.5113	46,0	flexible	5	13 € 90,90
515.5112	76,5	flexible	5	20 € 90,90

COARSE SANDING PNEUMATIC RANDOM ORBITAL SANDER WITH DUST EXTRACTION

- Compact construction height and light composite housing for controlled working
- For sanding or polishing
- Alternatively can be used with dust bag or industrial vacuum cleaner
- With 6 punched hole in pitch circle: 80 mm / Ø 11 mm
- Cold insulated handle



170,50 €

Technical data:

Oscillating circuit:	5 mm
Velcro disc receiver:	Ø 152,4 mm = 6"
Hose length:	2 m
Capacity:	240 Watt
No load current:	10000 r.p.m.
Vibration acceleration:	< 0,80 m/s ²
Noise performance level:	71 dbA
Noise pressure level:	60 dbA
Air consumption:	225 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"PT

	D mm	L mm	
515.3066	150,0	100,0	900

*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024

MULTIGRINDER



8
pcs

393,90 €

515.5430	8 pcs	4,70
-----------------	-------	------

PNEUMATIC MULTI-GRINDER SET

- For removing underbody coating, sealant, rust, corrosion, clingages, paints, films, text as well as for paint stripping
- For hard to reach places
- For working in hard to access areas
- Ideal for grinding and erasing work
- Robust housing



Technical data:

No load current:	4000 r.p.m.
Vibration acceleration:	< 0,7 m/s ²
Noise performance level:	100 dbA
Noise pressure level:	89,0 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT

ERASER

PNEUMATIC ERASING MACHINE


- Air exhaust through the handle rear end
- Ideal for removing of stickers glue and color remainders
- Stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Ultra light robust housing special plastic



133,90 €

Technical data:

Tool holder:	5/16" - 24 mm
Capacity:	370 Watt
No load current:	4000 r.p.m.
Vibration acceleration:	< 1,6 m/s ²
Noise performance level:	102,5 dbA
Noise pressure level:	91,5 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



	B mm	L mm	Suitable eraser disc	kg
515.5445	45,0	200,0	515.1243	0,76

STRIP REMOVING PAD WITH LAMELLAE

- For removing of stickers, glue and color remainders on varnished areas
- Includes neutral colored rubber eraser preventing a smearing on the surface
- Not suitable for pneumatic die grinders



Technical data:

Speed:	4000 rpm
Shaft:	M8

	Width mm	Ø mm	Content	kg	
515.1247	24,0	100	1	0,29	€ 15,90
515.1366	24,0	100	6	1,74	€ 89,90

STRIP REMOVING PAD WITH LAMELLAE

- For removing of stickers, glue and color remainders on varnished areas
- Includes neutral colored rubber eraser preventing a smearing on the surface
- Not suitable for pneumatic die grinders



Technical data:

Speed:	4000 rpm
Shaft:	M8

	Width mm	Ø mm	Content	kg	
515.1248	20,0	90	1	160	€ 21,50
515.1368	20,0	90	6	960	€ 66,50

STRIP REMOVING PAD

- For removing of stickers, glue and color remainders on varnished areas
- Includes neutral colored rubber eraser preventing a smearing on the surface
- Not suitable for pneumatic die grinders



Technical data:

Speed:	4000 rpm
Shaft:	M8

	Width mm	Ø mm	Content	kg	
515.1243	15,0	90,0	1	110	€ 5,90
515.1285	15,0	90,0	6	660	€ 29,90

STRIP REMOVING PAD WITH LAMELLAE

- For removing of stickers, glue and color remainders on varnished areas
- Includes neutral colored rubber eraser preventing a smearing on the surface
- Not suitable for pneumatic die grinders



Technical data:

Speed:	4000 rpm
Shaft:	M8

	Width mm	Ø mm	Content	kg	
515.1249	26,5	100	1	0,26	€ 27,90
515.1369	26,5	100	6	1,56	€ 133,90

MANDREL FOR STRIP REMOVING PAD

- with internal M8 thread
- Tension pin shaft Ø 6 mm
- for fastening film erasure discs on drilling machines



3,50 €

	Size internal thread	Length mm	kg
515.1218	M8	40,0	25

BURNISHER

SLIMPOWER MINI-PNEUMATIC BURNISHER


- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Stepless speed regulation
- Very compact construction



223,⁹⁰ €

Technical data:

Capacity:	186 Watt
No load current:	5000 r.p.m.
Sponge diameter:	50 + 75 mm
Polishing sponge diameter:	46 mm
Vibration acceleration:	< 3,3 m/s ²
Noise performance level:	96,9 dbA
Noise pressure level:	85,9 dbA
Air consumption:	240 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT



SLIMPOWER

	B mm	L mm	kg
515.5590	55,0	140,0	600

PNEUMATIC POLISHER


- Angled design
- For one hand operation
- Ideal for polishing work
- Very compact construction
- Including 1 velcro holder Ø 75 mm



200,⁵⁰ €

Technical data:

Capacity:	370 Watt
No load current:	3000 r.p.m.
Sponge diameter:	75 mm
Polishing sponge diameter:	85 mm
Vibration acceleration:	< 0,9 m/s ²
Noise performance level:	103,2 dbA
Noise pressure level:	92,2 dbA
Air consumption:	350 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT



	B mm	L mm	kg
515.5455	9,0	210,0	1,14

GRINDING DISC

- With Velcro receiver
- With internal thread receiver



	Ø mm		Pcs	kg	€
515.5101	46,0	flexible	5	275	79,⁵⁰
515.5102	75,0	flexible	5	125	79,⁵⁰
515.5103	46,0	rigid	5	55	29,⁹⁰

BURNISHING PADS

- For burnishing of smooth surfaces



	Colour	Ø mm	Pcs	kg	€
515.5126	plastic ●	50,0	5	10	16,⁵⁰
515.5122	plastic ●	85,0	5	55	79,⁵⁰
515.5127	plastic ○	50,0	5	10	16,⁵⁰
515.5123	plastic ○	85,0	5	55	79,⁵⁰
515.5128	plastic ●	50,0	5	10	16,⁵⁰
515.5129	leather	50,0	5	48	21,⁵⁰
515.5124	leather	80,0	5	80	66,⁵⁰

MINI BURNISHING MACHINE

- For hard to reach places and improvement work
- Angled design
- Ideal for curved cutting
- Vibration dampened
- Very compact construction



127,⁵⁰ €

Technical data:

Capacity:	150 Watt
No load current:	2500 r.p.m.
Polishing sponge diameter:	75 mm
Vibration acceleration:	< 0,77 m/s ²
Noise performance level:	92 dbA
Noise pressure level:	81 dbA
Air consumption:	113 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 5,2 bar
Connection thread:	1/4"



	B mm	L mm	kg
515.5121	110,0	120,0	1,00

*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024



5 pcs

175,50 €

MINI PNEUMATIC BURNISHER SET

- For hard to reach places and improvement work
- Angled design
- Ideal for curved cutting
- Vibration dampened
- Very compact construction

Technical data:

No load current:	2500 r.p.m.
Polishing sponge diameter:	75 mm
Vibration acceleration:	< 0,77 m/s ²
Noise performance level:	94 dbA
Noise pressure level:	81 dbA
Air consumption:	113 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 5,2 bar
Connection thread:	1/4"



515.5120	5 pcs	1,80
-----------------	-------	------

GRINDING DISC

- With Velcro receiver
- With external thread receiver



	∅ mm		Pcs		€
515.5113	46,0	flexible	5	13	90,90
515.5112	76,5	flexible	5	20	90,90

BURNISHING PADS

- For burnishing of smooth surfaces



	Colour	∅ mm	Pcs		€
515.5126	plastic yellow	50,0	5	10	16,50
515.5122	plastic yellow	85,0	5	55	79,50
515.5127	plastic white	50,0	5	10	16,50
515.5123	plastic white	85,0	5	55	79,50
515.5128	plastic black	50,0	5	10	16,50
515.5129	leather	50,0	5	48	21,50
515.5124	leather	80,0	5	80	66,50

PNEUMATIC POLISHER


- Handy and ergonomic housing
- Polishing with a fast and excellent work result
- Lateral handle for better guidance of the polisher
- For two-hand operation
- Stepless speed regulation



Technical data:

Capacity:	450 Watt
No load current:	3500 r.p.m.
Sponge diameter:	150 mm
Polishing sponge diameter:	145 mm
Vibration acceleration:	< 1,20 m/s ²
Noise performance level:	80 dbA
Noise pressure level:	91 dbA
Air consumption:	110 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Tool holder:	5/16" UNF
Connection thread:	1/4"

327,50 €



	H mm	B mm	L mm	
515.3063	158,0	123,0	240,0	2,20

NEEDLE SCALER

PNEUMATIC NEEDLE SCALER


- In handy pistol design
- For removing and/or derusting of coatings and solid metal parts
- Is coarser than a sand blasting and finer than rust hammers
- Equipped with 19 needles of 3 mm a piece
- Cold insulated handle

Technical data:

Needle amount:	19 pcs à 3 mm
Number of blows:	3200 blows/min
Vibration acceleration:	< 8,70 m/s ²
Noise performance level:	110 dbA
Noise pressure level:	97 dbA
Air consumption:	170 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



241,90 €



	B mm	D mm	L mm	Replacement needle pack	
515.3070	205,0	45,0	330,0	515.3071	2,60

*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024

COMPRESSED AIR TOOLS

SLIMPOWER MINI-PNEUMATIC RECIPROCATING BODYWORK KEY HOLE SAW


- Very compact construction
- Suitable for small sawing radius
- For one hand operation
- For works in car body panels, beams and profile
- Stepless speed regulation



163,90 €

Technical data:

Stroke:	7,9 mm
Cutting strokes:	5760 strokes/min
Capacity:	186 Watt
Vibration acceleration:	< 28,8 m/s ²
Noise pressure level:	90,3 dbA
Noise performance level:	101,3 dbA
Air consumption:	240 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



SLIMPOWER

	B mm	L mm	Replacement saw insert	📦
515.5545	36,0	170,0	129.3740- 129.3746	500

PNEUMATIC OSCILLATING CUTTER SET

- Angled design
- Air exhaust through the handle
- For one handed operation with ergonomic design
- For the professional dismantling of vehicle discs
- Universal blade reception for all standard blades

**6
pcs**



Technical data:

Oscillating speed:	20000
No load current:	20000 r.p.m.
Vibration acceleration:	< 14,8 m/s ²
Noise performance level:	103,7 dbA
Noise pressure level:	92,7 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT


235,50 €

	📦	kg
515.5450	6 pcs	2,05

JIGSAW BLADES

- Flexible and shatter proof
- ideal for non-ferrous metal, stainless steel, sheet steel, car body sheet, pressed materials and resopal


Suitable for: Ober, KS, Pneutec, CP, KS 515.3000 und 515.3200

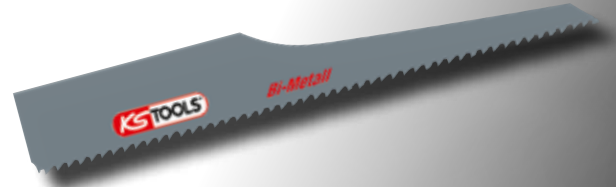

	Quantity Teeth	TPI	Thickness mm	Length mm	Content	📦	€
129.3740	80	32	1,0	100,0	5	30	13,90
129.3742	60	24	1,0	100,0	5	30	13,90
129.3744	45	18	1,0	100,0	5	30	13,90
129.3746	35	14	2,0	100,0	5	30	13,90

CUTTING / SCRAPER BLADES


- For the pneumatic oscillating cutter
- Special tool steel

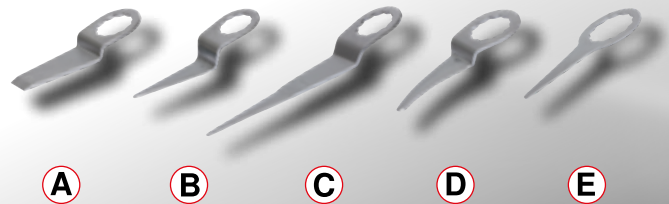

		📦	€
140.2252	Scraping blade offset, width 16mm	20	21,50
140.2255	Cutting blade straight, offset, 50mm	20	21,50
140.2256	Cutting blade straight, offset, 90mm	30	29,90
140.2261	Cutting blade angled, offset, depth 55mm	20	21,50
140.2263	Cutting blade straight, depth 35mm	10	21,50

CUTTING / SCRAPER BLADES

- For the pneumatic oscillating cutter
- Special tool steel

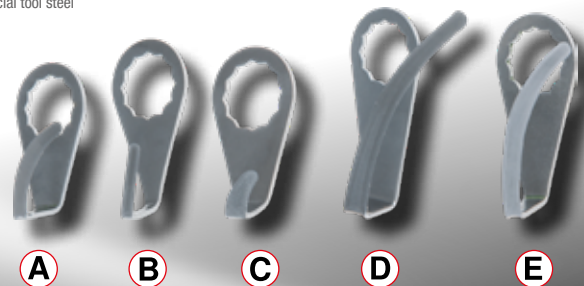

		📦	€
515.5093	Scraper blade, curved, offset, blade length 18mm	13	29,90
515.5094	Scraper blade, curved, offset, blade length 36mm	13	34,50
515.5095	Scraper blade, curved, offset, blade length 63mm	13	39,50
515.5096	Scraper blade, curved, offset, blade length 90mm	25	46,50
515.5097	Scraper blade, curved, straight, blade length 24 mm	12	34,50

*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024

LONG-DISC CUTTER

SLIMPOWER MINI-PNEUMATIC DISC CUTTER, SHORT


- Very compact construction
- Ideal for loosening worn down and/or rusted connections
- For working in inaccessible places
- For cutting wheels up to Ø 50.4 x 1.1 x 9.56mm
- For grinding wheels up to Ø 59.0 x 4.0 x 9.56mm



170,⁵⁰ €

Technical data:

Tool holder:	9,6 mm
Capacity:	220 Watt
No load current:	19000 r.p.m.
Vibration acceleration:	< 3,7 m/s ²
Noise performance level:	95,4 dbA
Noise pressure level:	84,4 dbA
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



slimPOWER

	B mm	L mm	Weight kg
515.5550	60,0	125,0	400

SLIMPOWER MINI-PNEUMATIC LONG-DISC CUTTER


- Ideal for loosening worn down and/or rusted connections
- For working in inaccessible places
- Long service life
- Stepless speed regulation
- Very compact construction



200,⁵⁰ €

Technical data:

Tool holder:	9,6 mm
Capacity:	220 Watt
No load current:	18000 r.p.m.
Vibration acceleration:	< 2,8 m/s ²
Noise performance level:	98,7 dbA
Noise pressure level:	87,7 dbA
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



slimPOWER

	B mm	L mm	Weight kg
515.5555	50,0	230,0	500

SLIMPOWER MINI-PNEUMATIC DISC CUTTER, LONG


- Very compact construction
- Ideal for loosening worn down and/or rusted connections
- For working in inaccessible places
- Long service life
- Stepless speed regulation



223,⁹⁰ €

Technical data:

Tool holder:	9,6 mm
Capacity:	220 Watt
No load current:	18000 r.p.m.
Vibration acceleration:	< 3,2 m/s ²
Noise performance level:	98,4 dbA
Noise pressure level:	87,4 dbA
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



slimPOWER

	B mm	L mm	Weight kg
515.5560	50,0	275,0	700

PNEUMATIC CUT-OFF SANDER

- Air exhaust through the handle
- For cutting wheels up to Ø 75 mm x 10 mm
- For cutting metal sheet and steel
- For working in inaccessible places
- Stepless speed regulation



79,⁵⁰ €

Technical data:

Capacity:	370 Watt
No load current:	23000 r.p.m.
Vibration acceleration:	< 6,2 m/s ²
Noise performance level:	103,2 dbA
Noise pressure level:	92,2 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT




	B mm	L mm	Weight kg
515.5440	85,0	200,0	820

HIGH PERFORMANCES THIN CUTTING DISK

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced
- Inox stainless steel



50 x



	Rpm max.	D1 mm	D2 mm	Height mm	Content	kg	
515.5056	30600	50,0	10	1,1	50	650	€ 66, ⁵⁰
515.5057	20100	75,0	10	1,5	50	710	€ 106, ⁹⁰

PNEUMATIC SHORT DISC CUTTER


- Air exhaust through the handle rear end
- Ideal for loosening worn down and/or rusted connections
- For working in inaccessible places
- Stepless speed regulation
- Ultra light Aluminium housing



236,⁵⁰ €

Technical data:

Tool holder:	6,3 mm
No load current:	15000 r.p.m.
Vibration acceleration:	< 5,8 m/s ²
Noise performance level:	104,8 dbA
Noise pressure level:	93,8 dbA
Air consumption:	350 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT



	Width mm	Length mm	Replacement-cutting wheel	kg
515.5475	60,0	345,0	337.2010	1,41

HIGH PERFORMANCES THIN CUTTING DISK

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced



25 x



50,⁵⁰ €

	Rpm max.	D1 mm	D2 mm	Height mm	Content	kg
337.2010	15250	100,0	16,0	1,6	25	1,20


REINFORCED GRINDING DISC

- For universal usage
- High level of flexibility
- Consistent high cutting power

Ideal for use in metal and stainless steel.

25 x

100,⁵⁰ €



	Rpm max.	D1 mm	D2 mm	Height mm	Content	kg
515.5058	22000	59,0	9,56	4,0	25	600

CHISEL HAMMER

VIBRO IMPACT PNEUMATIC CHISEL HAMMER SET

- With non slip soft grip handle
- Ideal for industry
- Efficient, gentle loosening of screw fittings
- With stepless impact regulation
- Vibration dampened



6
pcs



Technical data:

Chisel holder:	10,2
Number of blows:	2200 strokes/min
Vibration acceleration:	< 11,55
Noise performance level:	100 dbA
Noise pressure level:	100 dbA
Air consumption:	114 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT

369,⁹⁰ €

515.3880

6 pcs

5,70

VIBRO-IMPACT HALF-ROUND CHISEL WITH ANTI-ROTATION DEVICE

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Universal use for bodywork and chassis repair
- Extension of the working range
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer
- Robust chisel forged out of one piece
- Special tool steel

Application: Cutting exhausts, loosening of ball joint, extracting bolts and cutting metal sheets



39,⁵⁰ €

Width mm	Length mm	
26,0	195,0	210

515.3966

VIBRO-IMPACT SHEET METAL CUTTING TOOL WITH ANTI-ROTATION DEVICE

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Universal use for bodywork and chassis repair
- Extension of the working range
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer
- Robust chisel forged out of one piece
- Special tool steel

Application: Cutting exhausts, loosening of ball joint, extracting bolts and cutting metal sheets



39,⁵⁰ €

Width mm	Length mm	
20,0	175,0	160

515.3964

VIBRO-IMPACT FLAT CHISEL WITH ANTI-ROTATION DEVICE

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Universal use for bodywork and chassis repair
- Extension of the working range
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer
- Robust chisel forged out of one piece
- Special tool steel

Application: Cutting exhausts, loosening of ball joint, extracting bolts and cutting metal sheets



39,⁵⁰ €



Width mm	Length mm	
19,0	190,0	220

515.3965

VIBRO-IMPACT EXHAUST CHISEL

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Universal application for work on exhaust systems
- Specially designed sounds enable the exhaust pipe (inner or outer) to be replaced to be correctly separated from the remaining one, without damaging it.
- Rotatable
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer



Application range

515.3962	Internal pipe	190	€ 39, ⁵⁰
515.3963	External pipe	190	€ 39, ⁵⁰

VIBRO-IMPACT SEPARATING FORK

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer
- Universal use for bodywork and chassis repair
- Extension of the working range



515.3967	Vibro Power fork separator 20mm	295	€	39,50
515.3968	Vibro Power fork separator 24mm	375	€	39,50
515.3969	Vibro Power fork separator 35mm	395	€	39,50

IMPACT TIE ROD TOOL

- Vibration supported release of tracking rods, contoured screws or screws in the axle area etc.
- The special vibrating mandrel applies an impact pulse to the screw connection to be loosened, thereby loosening rust and supporting the loosening process
- Pneumatic chisel adapter (10 mm) for use with pneumatic chisel hammers on the market



	Width mm	Length mm	U opening in mm	kg
150.1608	50,0	290,0	27,0	2,36

VIBRO-IMPACT BALL JOINT RELEASER

- Vibration supported release on ball joints
- Adjustable, e.g. conical seat connections to wheel bearing houses and wishbones
- Pneumatic chisel adapter (10 mm) for use with pneumatic chisel hammers on the market
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer
- Special tool steel



	Width mm	Length mm	Height mm	Drive	kg
515.3884	40,0	68,0	130,0	Ø 10 mm	340

VIBRO-IMPACT PUNCH

- Suitable for use with industry-standard percussion hammers (10.0 mm holder)
- Universal use for bodywork and chassis repair
- Extension of the working range
- Utilisation of vibration and shock pulse of Vibro Power pneumatic hammer

Application: Cutting exhausts, loosening of ball joint, extracting bolts and cutting metal sheets



	Ø mm	Length mm	kg
515.3961	6,5	177,0	95

CLAMP SCREWS EJECTOR

FOUR LINK DRIFT SET

- For removing the clamp screws in the four-wheel front axle on VAG vehicles
- Saves a lot of time
- Warming is no longer necessary, therefore preventing damage to the aluminium axle body
- For use with pneumatic chisel hammers on the market with a 10 mm attachment
- Special tool steel

3
pcs



	kg
700.5635	168

TOOLS FOR EXHAUST SENSORS

IMPACT LAMBDA SENSOR HINGED WRENCH 22.0 MM

- Specialist loosening tool for the simple assembly and dismantling of stuck Lambda sensors
- Enables highly-corroded Lambda sensors to be released easily
- For most current vehicle types
- Time-saving to work with



	Spanner width mm	Length mm	kg
150.2113	22,0	200,0	540

CHISEL HAMMER

HIGH-PERFORMANCE VIBRO-IMPACT PNEUMATIC CHISEL HAMMER

- With non slip handle
- Air exhaust through the handle
- Ergonomic designed handle
- Air exhaust integrated in the handle
- Ideal for industry
- Efficient, gentle loosening of screw fittings
- With stepless impact regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light housing from two component plastic



921,50 €

Technical data:

Chisel holder:	15 mm
Number of blows:	2500 blows/min
Vibration acceleration:	20,4 m/s ²
Noise performance level:	115 dbA
Noise pressure level:	104 dbA
Air consumption:	210 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT

	Length mm	
515.4880	380,0	5,40

VIBRO-IMPACT HAMMER INSERT

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



187,50 €

	Length mm	Width mm	
515.4883	295,0	45,0	1460

VIBRO-IMPACT POINTED CHISEL, XL

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



88,90 €

	Length mm	
515.4884	290,0	tips 630

VIBRO-IMPACT TIE ROD REMOVER

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



211,90 €

	Length mm	Width mm	
515.4881	295,0	45,0	1430

VIBRO-IMPACT CONCAVE INSERT

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



200,50 €

	Length mm	Width mm	
515.4885	295,0	45,0	1420

VIBRO-IMPACT FLAT CHISEL, XL

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



106,90 €

	Length mm	Width mm	
515.4882	290,0	24,0	670

VIBRO-IMPACT DRIFTERS

- Pneumatic chisel adapter (15 mm) for use with pneumatic chisel hammers on the market
- Extension of the working range
- Utilisation of the vibration and impact impulse of the high-performance vibro-impact
- Robust chisel forged out of one piece
- Special tool steel



106,90 €

	Length mm	Width mm	
515.4886	225,0	20,0	550

IMPACT WRENCHES

MONSTER XTREMELIGHT MINI BIT PNEUMATIC IMPACT DRIVER WITH FORWARD/REVERSE ROCKER

- Ideally suited for work in confined spaces
- With practical rocker switch (left / right)
- Easy operation
- 3 stage torque adjustment
- Air connection can be swivelled through 150°

Technical data:

Square drive:	1/4"
Max. tightening torque:	108 Nm
Max. loosening torque:	108 Nm
No load current:	12000 r.p.m.
Vibration acceleration:	7 m/s ²
Noise performance level:	109 dbA
Noise pressure level:	98 dbA
Recommended torque:	79 Nm
Air consumption:	59 l/min
Operating pressure:	max. 6 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

1/4"



133,90 €

	B mm	L mm	kg
515.3835	55,0	140,0	550



1/4"

3/8"



MONSTER XTREMELIGHT MINI PNEUMATIC IMPACT DRIVER WITH FORWARD/REVERSE ROCKER

- Ideally suited for work in confined spaces
- With practical rocker switch (left / right)
- Easy operation
- 3 stage torque adjustment
- Air connection can be swivelled through 150°

Technical data:

Max. tightening torque:	108 Nm
Max. loosening torque:	108 Nm
No load current:	12000 r.p.m.
Vibration acceleration:	7 m/s ²
Noise performance level:	109 dbA
Noise pressure level:	98 dbA
Recommended torque:	79 Nm
Air consumption:	59 l/min
Operating pressure:	max. 6 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	Square drive	B mm	L mm	kg	
515.1470	1/4"	55,0	140,0	550	€ 133,90
515.3830	3/8"	55,0	140,0	550	€ 133,90

MINIMONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- High performance industrial jumbo mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light Aluminium housing

Technical data:

Max. tightening torque:	1 = 270 Nm 2 = 640 Nm 3 = 965 Nm
Max. loosening torque:	1390 Nm
No load current:	10000 r.p.m.
Vibration acceleration:	< 9,18 m/s ²
Noise performance level:	113 dbA
Noise pressure level:	102 dbA
Recommended torque:	615 Nm
Air consumption:	135 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

3/8"

1/2"




	Square drive	B mm	L mm	kg	
515.1190	3/8"	95,0	190,0	1,34	€ 170,50
515.1270	1/2"	95,0	190,0	1,34	€ 149,90

PROTECTIVE COVER FOR MINIMONSTER

- suitable for Mini Monster Impact Wrenches 515.1190 and 515.1270
- Protective cover minimises damage from daily use to impact wrenches
- Transparent
- Silicon

9,90 €



	Suitable for	kg
515.1272	Silicone for 515.1190 and 515.1270	50

*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024



MONSTER HIGH PERFORMANCE PNEUMATIC ANGLE IMPACT WRENCH

- 2-fold torque preselection
- Ring in handle proximity for right / left running for better operating convenience
- High performance double hammer mechanism
- Long service life

Technical data:

Square drive:	1/2"
Max. tightening torque:	271 Nm
Max. loosening torque:	271 Nm
No load current:	4150 r.p.m.
Vibration acceleration:	< 8,24 m/s ²
Noise performance level:	105,4 dbA
Noise pressure level:	94,4 dbA
Recommended torque:	244 Nm
Air consumption:	105 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	B mm	L mm	kg
515.1625	55,5	350,0	1,57

MINIMONSTER XTREMLIGHT HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- Easy to change lever for right and left handers
- 3 stage torque adjustment
- High performance industrial jumbo mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light Aluminium housing

Technical data:

Max. tightening torque:	1 = 270 Nm 2 = 640 Nm 3 = 965 Nm
Max. loosening torque:	1390 Nm
No load current:	10000 r.p.m.
Vibration acceleration:	< 9,18 m/s ²
Noise performance level:	113 dbA
Noise pressure level:	102 dbA
Recommended torque:	615 Nm
Air consumption:	135 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT




	Square drive	B mm	L mm	kg	
515.3855	3/8"	90,0	185,0	1,08	€ 200, ⁵⁰
515.1150	1/2"	90,0	185,0	1,08	€ 199, ⁹⁰

PROTECTIVE COVER FOR MINIMONSTER XTREMLIGHT

- suitable for Mini Monster Xtremelight Impact Wrenches 515.1150 + 515.3855
- Protective cover minimises damage from daily use to impact wrenches
- Transparent
- Silicon

9,90 €



	Suitable for	kg
515.1273	Silicone for 515.1150 + 515.3855	50



THE MINIDEVIL HIGH PERFORMANCE IMPACT WRENCH

- Easy operation
- 3 stage torque adjustment
- High performance jumbo mechanism
- Long service life
- Ultra light aluminium housing

Technical data:

Square drive:	1/2"
Max. tightening torque:	1 = 210 Nm 2 = 503 Nm 3 = 755 Nm
Max. loosening torque:	1084 Nm
Vibration acceleration:	<10,36 m/s ²
No load current:	9000 r.p.m.
Noise performance level:	115 dbA
Noise pressure level:	106 dbA
Air consumption:	169 l/min
Operating pressure:	6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	B mm	L mm	kg
515.1315	115,0	180,0	1,20


*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024



THE DEVIL HIGH PERFORMANCE IMPACT WRENCH

- Easy operation
- 3 stage torque adjustment
- High performance double hammer mechanism
- Long service life
- Ultra light aluminium housing



	515.1200	515.3400
Square drive:	1/2"	3/4"
Max. tightening torque:	1 = 490 Nm 2 = 660 Nm 3 = 870 Nm	1 = 660 Nm 2 = 1010 Nm 3 = 1290 Nm
Max. loosening torque:	1600 Nm	2000 Nm
No load current:	8500 r.p.m.	8500 r.p.m.
Vibration acceleration:	17,5 m/s ²	17,25 m/s ²
Noise performance level:	100,9 dbA	100,9 dbA
Noise pressure level:	89,9 dbA	91 dbA
Recommended torque:	550 Nm	860 Nm
Air consumption:	169 l/min	196 l/min
Operating pressure:	max. 6,3 bar (90 psi)	6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm	3/8" - 10 mm
Connection thread:	1/4"PT	1/4"PT

	B mm	L mm	kg	
515.1200	170,0	185,0	2,10	€ 69, ⁹⁰
515.3400	170,0	185,0	2,20	€ 124, ⁹⁰



MONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With practical clockwise and anticlockwise switch
- Easy operation
- High performance double hammer mechanism
- Long service life



	515.1210	515.3785
Square drive:	1/2"	3/4"
Max. tightening torque:	1 = 510 Nm 2 = 680 Nm 3 = 931 Nm	1 = 510 Nm 2 = 680 Nm 3 = 931 Nm
Max. loosening torque:	1690 Nm	1690 Nm
No load current:	7930 r.p.m.	7930 r.p.m.
Vibration acceleration:	< 17,9 m/s ²	< 13,56 m/s ²
Noise performance level:	98 dbA	104 dbA
Noise pressure level:	87 dbA	88 dbA
Recommended torque:	542 Nm	542 Nm
Air consumption:	178 l/min	178 l/min
Operating pressure:	max. 6,3 bar	max. 6,3 bar
Min. tube diameter:	1/2" - 12,7 mm	1/2" - 12,7 mm
Connection thread:	1/4"PT	1/4"PT

	B mm	L mm	kg	
515.1210	175,0	200,0	2,15	€ 149, ⁹⁰
515.3785	175,0	200,0	2,20	€ 189, ⁹⁰

SUPERMONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With four-stage torque adjustment for tightening and loosening
- Easy operation
- High performance double hammer mechanism
- Long service life




3/4"

849,90 €

Technical data:

Square drive: 3/4"
Max. tightening torque:
1 = 919 Nm
2 = 1523 Nm
3 = 2145 Nm
Max. loosening torque: 3405 Nm
Vibration acceleration: < 12,57 m/s²
Measuring uncertainty vibration acceleration: 1,73 m/s²
No load current: 6200 r.p.m.
Noise performance level: 104,5 dbA
Noise pressure level: 115,5 dbA
Air consumption: 283 l/min
Operating pressure: max. 6,3 bar (90 psi)
Min. tube diameter: 3/4" - 19 mm
Max. screw size: M 38
Connection thread: 1/2"PT



MONSTER
super

	Width mm	Length mm	kg
515.3250	230,0	350,0	6,70

SUPERMONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With four-stage torque adjustment for tightening and loosening
- Easy operation
- High performance double hammer mechanism
- Long service life




3/4"

904,90 €

Technical data:

Square drive: 3/4"
Max. tightening torque:
1 = 919 Nm
2 = 1523 Nm
3 = 2145 Nm
Max. loosening torque: 3405 Nm
Vibration acceleration: < 12,88 m/s²
Measuring uncertainty vibration acceleration: 1,77 m/s²
No load current: 6200 r.p.m.
Noise performance level: 104,5 dbA
Noise pressure level: 115,5 dbA
Air consumption: 283 l/min
Operating pressure: max. 6,3 bar (90 psi)
Min. tube diameter: 3/4" - 19 mm
Max. screw size: M 38
Connection thread: 1/2"PT



MONSTER
super

	Width mm	Length mm	kg
515.3260	230,0	504,0	7,76

SUPERMONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With four-stage torque adjustment for tightening and loosening
- Easy operation
- High performance double hammer mechanism
- Long service life




1"

849,90 €

Technical data:

Square drive: 1"
Max. tightening torque:
1 = 919 Nm
2 = 1523 Nm
3 = 2145 Nm
Max. loosening torque: 3405 Nm
Vibration acceleration: < 12,57 m/s²
Measuring uncertainty vibration acceleration: 1,73 m/s²
No load current: 6200 r.p.m.
Noise performance level: 104,5 dbA
Noise pressure level: 115,5 dbA
Air consumption: 283 l/min
Operating pressure: max. 6,3 bar (90 psi)
Min. tube diameter: 3/4" - 19 mm
Max. screw size: M 38
Connection thread: 1/2"PT



MONSTER
super

	Width mm	Length mm	kg
515.3270	230,0	350,0	6,75

SUPERMONSTER HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With four-stage torque adjustment for tightening and loosening
- Easy operation
- High performance double hammer mechanism
- Long service life




1"

904,90 €

Technical data:

Square drive: 1"
Max. tightening torque:
1 = 919 Nm
2 = 1523 Nm
3 = 2145 Nm
Max. loosening torque: 3405 Nm
Vibration acceleration: < 12,88 m/s²
Measuring uncertainty vibration acceleration: 1,77 m/s²
No load current: 6200 r.p.m.
Noise performance level: 104,5 dbA
Noise pressure level: 115,5 dbA
Air consumption: 283 l/min
Operating pressure: max. 6,3 bar (90 psi)
Min. tube diameter: 3/4" - 19 mm
Max. screw size: M 38
Connection thread: 1/2"PT



MONSTER
super

	Width mm	Length mm	kg
515.3280	230,0	504,0	7,82



The AGR quality cachet (Aktion Gesunder Rücken = Campaign for Healthier Backs): Certified and recommended by Association Forum Healthy Back - Better Living and Federal Association of German Back Schools. More information: AGR e.V., Stader Str. 6, D - 27432 Bremervörde, Phone +49 4761/92 63 580, www.agr-ev.de



EXTREMELY STRONG



EXTREMELY SMALL EXTREMELY LIGHT



FOR RIGHT AND LEFT HANDED USE



ONE HAND OPERATION



1/2"

MINIMONSTER XTREME LIGHT HIGH PERFORMANCE PNEUMATIC IMPACT WRENCH

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- Easy to change lever for right and left handers
- 3 stage torque adjustment
- High performance industrial jumbo mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- ultra light composite housing

199,90 €

Technical data:

Max. tightening torque:	1 = 270 Nm 2 = 640 Nm 3 = 965 Nm
Max. loosening torque:	1390 Nm
No load current:	10000 r.p.m.
Vibration acceleration:	< 9,18 m/s ²
Noise performance level:	113 dbA
Noise pressure level:	102 dbA
Recommended torque:	615 Nm
Air consumption:	135 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	B mm	L mm	kg
515.1150	90,0	185,0	1,08

RIVETING TOOLS PISTOL

PNEUMATIC RIVETING TOOL PISTOL

- Air exhaust through the handle
- For one handed operation with ergonomic design
- For pop rivet working
- Cold insulated
- Includes 1/4" coupling connector
- Robust aluminium housing




291,⁵⁰ €



Technical data:

Rivet sizes:	2,4 - 3,2 - 4,0 - 4,8 mm
Stroke length:	14 mm
Driving power:	8677,5 N
Vibration acceleration:	< 1,20 m/s ²
Noise performance level:	98,6 dbA
Noise pressure level:	85 dbA
Air consumption:	1 l/stroke
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	B mm	L mm	kg
515.3102	195,0	290,0	1,50

PNEUMATIC RIVETING TOOL PISTOL

- Air exhaust through the handle
- For one handed operation with ergonomic design
- For professional riveting, continuous operation
- For steel, aluminium, stainless steel or copper riveting up to 6,4 mm
- With 6 mouth pieces, 4,8 mm is pre assembled
- Especially low noise level
- Cold insulated
- Includes 1/4" coupling connector
- Robust aluminium housing



327,⁵⁰ €



Technical data:

Rivet sizes:	2,4 - 3,2 - 4 - 4,8 - 5,6 - 6,4mm
Stroke length:	19 mm
Driving power:	13839,5 N
Vibration acceleration:	< 0,60 m/s ²
Noise performance level:	85 dbA
Noise pressure level:	73,3 dbA
Air consumption:	1.8 l/stroke
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT



	B mm	L mm	kg
515.3101	210,0	340,0	2,00

GREASE GUN

PNEUMATIC GREASE GUN FOR STROKE BY STROKE CONVEYANCE OF GREASE


- Air exhaust through the handle
- For one handed operation with balanced ergonomic design
- For cartridges and buckets and/or also for loose grease
- Includes flexible hose and nozzle
- Includes 1/4" coupling connector
- Grease feeding: one stroke per trigger actuation



66,⁵⁰ €

Technical data:

Output pressure:	260 bar
Output per stroke cm ³ :	1,30
Capacity:	400 g
Air consumption:	170 l/min
Operating pressure:	6,3 bar (90 psi)
Connection thread:	1/4"PT




	B mm	L mm	kg
515.3900	165,0	400,0	1,50

QUICK-LOCK COUPLING FOR GREASE GUNS

- Ideal for commercially available manual, battery operated and pneumatic grease guns
- Secure greasing during maintenance work without holding in place
- Uncoupling possible with pressures up to over 690 bar
- No spraying when uncoupling
- Simple and secure loosening, even under high pressure through lever actuation



39,⁵⁰ €

	Connection thread	Length mm	Height mm	
980.1108	1/8"PT	74,0	38,0	100

GREASE GUN ADAPTOR SET

- Ideal for commercially available manual, battery operated and pneumatic grease guns
- Adaptor with sliding sleeve for break-proof connection
- Straight and angled grease nipple
- For grease nipples out of steel, brass and stainless steel

7 pcs

Application range: Cone, funnel, ball and flat grease nipples



54,⁵⁰ €

			
980.1100	7 pcs		1,99

PRESSURISED AIR PISTOL CARTRIDGES

PNEUMATIC CARTRIDGE PISTOLS 310 ML

- For working with cartridges and soft packs
- Ideal for glue, silicone or acrylic based cartridges
- For gluing front windcreens as well as most rear and side windows
- Perfect run in the cartridge cylinder with the telescopic principle and therefore no cylinder tipping or air intake
- Drip-free mechanism



157,⁵⁰ €

Technical data:

Compressive force:	90 kg
Operating pressure:	max. 6,3 bar (90psi)
Max. flow rate:	40 l/min
Noise pressure level:	70 dbA
Connection thread:	1/4"PT

	Length mm	Height mm	Replacement nozzle	
515.1975	400,0	200,0	980.1001	1,00

PNEUMATIC CARTRIDGE PISTOLS 600 ML

- For working with cartridges and soft packs
- Ideal for glue, silicone or acrylic based cartridges
- For gluing front windcreens as well as most rear and side windows
- Perfect run in the cartridge cylinder with the telescopic principle and therefore no cylinder tipping or air intake
- Drip-free mechanism



200,⁵⁰ €

Technical data:

Compressive force:	90 kg
Operating pressure:	max. 6,3 kg/cm ³ (90psi)
Max. flow rate:	40 l/min
Noise pressure level:	70 dbA
Connection thread:	1/4"PT

	Length mm	Height mm	Replacement nozzle	
515.1985	620,0	200,0	980.1001	1,30


AIR BLOW OUT TOOLS

TELESCOPIC PNEUMATIC BLOW OUT PISTOL

- With stepless extendable nozzle
- Telescopic blast pipe in length and angle adjustable 90 - 190 mm / 360°
- Ideal for cleaning and removing of foreign objects
- Controllable air volume
- Direct air coupling suitable for connection



27,90 €



	L2 mm	L3 mm	L4 mm	Weight
515.1907	120,0	90,0	195,0	200

PNEUMATIC BLOW OUT PISTOL WITH FLOW REGULATION


- Ideal for cleaning and removing of foreign objects
- Controllable air volume
- Direct air coupling suitable for connection
- Easy to operate
- Ultra light robust housing special plastic



9,90 €

Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. flow rate:	300 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4"PT



	L1 mm	L2 mm	L3 mm	Weight
515.1901	235,0	100,0	75,0	150


UNIVERSAL PNEUMATIC BLOW OUT PISTOL

- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- With hanging function
- Direct air coupling suitable for connection
- Easy to operate
- Slip proof handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic



Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. flow rate:	300 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4"PT



	L1 mm	L2 mm	L3 mm	Weight
515.1902	235,0	95,0	75,0	170
515.1903	470,0	330,0	75,0	240
515.1904	650,0	510,0	75,0	280

515.1902	235,0	95,0	75,0	170	€ 18,50
515.1903	470,0	330,0	75,0	240	€ 20,50
515.1904	650,0	510,0	75,0	280	€ 19,50

PNEUMATIC BLOW OUT PISTOL SET

- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- Direct air coupling suitable for connection
- Ultra light robust housing special plastic

3
pcs



19,90 €


515.1921	3 pcs	690
-----------------	-------	-----



24,90 €

PNEUMATIC BLOW OUT PISTOL WITH EXTENSION

- Ergonomic handle
- Controllable air volume
- With 2.5 mm nozzle
- Direct air coupling suitable for connection
- Easy to operate
- With hanging hole
- Includes 1/4" coupling connector
- Solid metal base body
- Robust metal housing



Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. flow rate:	130 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4"PT


	L1 mm	L2 mm	L3 mm	L4 mm	
515.1930	125,0	110,0	75,0	125,0	180

PROTECTIVE SHIELD FOR COMPRESSED-BLOWING PISTOLS

- Optimal protection for fluids spraying back or particles when blowing
- Suitable to be attached on the pneumatic blowing pistol
- Ideal for models with 6 mm nozzle diameter
- Stable protection shield made from see-through plastic
- Safe and easy use



9,90 €



	D1 mm	D2 mm	
515.1912	6,0	100,0	50

PNEUMATIC AIR BLOW GUN, LONG

- With 90° side nozzle and Venturi nozzle
- Ideal for cleaning and removing of foreign objects also in hard to reach places
- Grip area with insulated lance to protect it from cold
- Controllable air volume
- Direct air coupling suitable for connection



69,90 €

3
pcs

Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. flow rate:	540 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4"PT



	Length mm	
515.1915	1100,0	510

VACUUMS

PNEUMATIC SUCTION AND BLOW GUN

- zum Absaugen von Schmutz in den Staubbeutel sowie Ausblasen von Oberflächen
- Includes reinforced fabric dust collection bag
- Versatile usage
- Includes 1/4" coupling connector
- Robust housing



39,90 €

Technical data:

Operating pressure:	max. 6,3 bar (90 psi)
Max. flow rate:	96 l/min
Noise performance level:	97 dbA
Noise pressure level:	92 dbA
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"

	Length mm	
515.5090	145,0	670

PNEUMATIC CLEANING GUNS

PNEUMATIC CLEANING GUN

- Ideal for professional cleaning of cushions, door pillars, ventilation channels, carpets, foot mats, fabric seats etc.
- Unique, cyclonic, ball bearing mounted rotation cleaning technology
- For all possible surfaces, cleaned damp or dry
- Also suitable for hard-to-reach places, e.g. between seats and seams
- Cleaned surfaces also dry extremely quickly thanks for the fine misted cleaning solution



141,90 €

Technical data:

No load current: 8000 r.p.m.
 Vibration acceleration: < 3,9 m/s²
 Noise performance level: 106 dbA
 Noise pressure level: 95 dbA
 Operating pressure: max. 6,3 bar (90 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"PT



Capacity of the unit		
515.1980	1.000 ml	680

CLEANING BRUSH-ADAPTOR


- Ideal addition for cleaning the interior
- Can be used in conjunction with pneumatic cleaning guns (515.1980)
- With screw connection
- Plastic housing



515.1983	Cleaning Brush-Adaptor	27 € 5,90

CLEANING BRUSH

- Ideal addition for cleaning the interior
- Can be used in conjunction with pneumatic cleaning guns (515.1980)
- With hanging hole
- Plastic housing

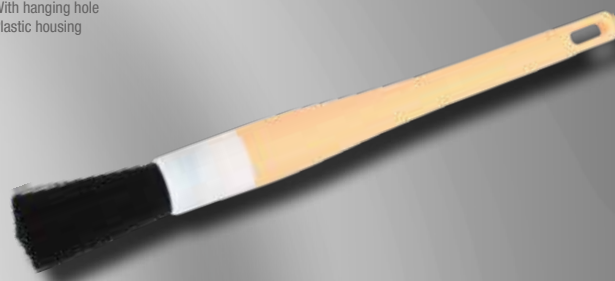

515.1986	Cleaning Brush	60 € 5,90

INTERNAL CLEANING

PNEUMATIC CLEANING GUN SET WITH SUCTION HOSE

- Ideal for professional cleaning of cushions, door pillars, ventilation channels, carpets, foot mats, fabric seats etc.
- Pneumatic operated with simple handling
- Unique, cyclonic, ball bearing mounted rotation cleaning technology
- For all possible surfaces, cleaned damp or dry
- Includes 360° rotating and 30° angled ball joint and plug nipple



211,90 €

Technical data:

No load current: 6000 r.p.m.
 Vibration acceleration: < 3,9 m/s²
 Noise performance level: 109 dbA
 Noise pressure level: 98 dbA
 Operating pressure: max. 6,3 bar (90 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"PT



Capacity of the unit		
515.1935	1.000 ml	1150

PNEUMATIC CLEANING GUNS

- Ideal for spraying cleaning fluids or oils
- With integrated storage tank 750 cm³
- Simple handling
- Sturdy design

Application range: Waxing, sealing, impregnating, spraying cold cleaners in or on to surfaces, washing agents, antirust agents, spray oils etc.



46,50 €

Technical data:

Operating pressure: max. 6,3 bar (90 psi)
 Air consumption: 170 l/min
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"

	Length mm	Height mm	Ø mm	
515.1911	310,0	230,0	4,5	500

SPRAY GUNS

PNEUMATIC SAND BLASTER

- Ideal for specific working
- Suitable for blasting material grain size 46-100
- Suitable for quartz sand, glass beads, plastic granulate, aluminium oxide, standard corundum and glass granulate
- Supply for blasting material can be switched off and therefore also be used as normal pneumatic guns

Application range: Paint stripping, paint removal, rust removal, cleaning, surface cleaning



100,⁵⁰ €

Technical data:

Operating pressure: max. 6,3 bar (90 psi)
 Air consumption: 200 l/min
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4" NPT

	Length mm	Height mm	Ø mm	kg
515.1909	260,0	280,0	5,0	1,30

PNEUMATIC CLEANING GUNS

SODA PNEUMATIC CLEANING GUN

- suitable for cleaning and removing paint, colours, etc.
- for all possible surfaces, such as glass, plastic, rubber, wood, stone, etc.
- Soda blasting agent neither heats nor warps the panel
- Efficient and environmentally-friendly cleaning with NaHCO₃ (soda)
- Cold insulated handle



79,⁵⁰ €

Technical data:

Operating pressure: max. 6,3 - 8,2 bar (90 - 120 psi)
 Min. tube diameter: 3/8" - 10 mm
 Connection thread: 1/4"
 Air consumption: 57 l/min

	kg
515.1919	1,47

SODA BLASTING AGENT

- suitable for cleaning and removing paint, colours, etc.
- for all possible surfaces, such as glass, plastic, rubber, wood, stone, etc.
- Soda blasting agent neither heats nor warps the panel
- Efficient and environmentally-friendly cleaning with NaHCO₃ (soda)
- in a practical 5 kg bucket



39,⁵⁰ €

Technical data:

Water content: < 0,25%
 Chloride content: < 150 ppm
 Sulphate content: < 150 ppm
 sieve fraction: < 0,5 mm: 95%

	kg
515.1923	5,38

PNEUMATIC FLUSH GUN

COOLING SYSTEM PNEUMATIC FLUSH GUN

- ideal for fast and efficient rinsing of the cooling system
- restores optimum operation of the cooling system
- can be used without solvents or aggressive chemicals
- works in conjunction with pneumatic and water, increasing the water pressure
- for all common coolant hoses



66,⁵⁰ €

Technical data:

Input pressure: max. 8,5 bar
 Operating pressure: max. 6,3 bar (90 psi)
 Connection thread: 1/4" PT

	Ø mm	Length mm	kg
515.1216	19,0 / 29,0 / 32,0 / 36,5 / 40,0	350,0	300

WHEEL FILLING GAUGE

CALIBRATED TYRE FILLING GAUGE

- For one handed operation with ergonomic design
- with rubber-coated manometer
- Manometer with bar scale
- With filling lever and pressure release button
- Hose with integrated locking male nipple



Technical data:

Working range: 0 - 10 bar
0 - 140 psi
Hose length: 400 mm
Operating pressure: max. 6,3 bar (90 psi)
Connection thread: 1/4"PT

61,90 €



515.1960

450

TYRE FILLING GAUGE

- For one handed operation with ergonomic design
- Manometer with bar and psi scale
- With filling lever and pressure release button
- long hose with integrated moment plug nipple
- Robust rubber coated housing



Technical data:

Working range: 0 - 12 bar
9 - 160 psi
Hose length: 600 mm
Operating pressure: max 6,3 bar (90 psi)
Connection thread: 1/4"PT

19,90 €



515.1950

600

TYRE FILLING GAUGE

- For one handed operation with ergonomic design
- Manometer with bar and psi scale
- With filling lever and pressure release button
- extra long hose with integrated instant nipple plug
- Robust rubber coated housing



Technical data:

Working range: 0 - 12 bar
0 - 174 psi
Hose length: 1000 mm
Operating pressure: 6,3 bar (90 psi)
Connection thread: 1/4"PT

47,50 €



515.1920

420

DIGITAL TYRE FILLING GAUGE

- For one hand operation
- Manometer with digital display
- With filling lever and pressure release button
- With automatic switch-on and off
- Switchable: Bar, PSI, KPA, Kg/cm²



Technical data:

Working range: 0 - 14 bar
0 - 200 psi
Battery: 2x 1,5V (AAA)
Hose length: 500 mm
Operating pressure: max. 6,3 bar (90 psi)
Working temperature: - 15°C to + 60°C
Connection thread: 1/4"PT

80,50 €



515.1970

490

PNEUMATIC VIBRO-EXTRACTOR



5
pcs

GLOW PLUG PNEUMATIC VIBRATION SCREWDRIVER SET

- Ideal for loosening and extracting jammed glow plugs
- Especially suitable in glow plugs jammed by corrosion and/or soot coal
- Produces controlled vibration impulse
- Suitable for all current glow plugs
- Extensive cost intensive repairs can be avoided through dismantling glow plugs



1/4"



- 1 = 10 Nm
- 2 = 20 Nm
- 3 = 30 Nm
- 4 = 40 Nm

1/4"



1/4" PT

Technical data:

Square drive:	1/4"
Max. tightening torque:	40 Nm
Max. loosening torque:	1 = 10 Nm 2 = 20 Nm 3 = 30 Nm 4 = 40 Nm
No load current:	7500 r.p.m.
Vibration acceleration:	< 2,52 m/s ²
Noise performance level:	104 dbA
Noise pressure level:	88 dbA
Recommended torque:	42 Nm
Air consumption:	128 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

266,⁵⁰ €

152.1060

5 pcs

1,80

AXLE BOOTS ASSEMBLY DEVICES

PNEUMATIC ASSEMBLY TOOL FOR CV JOINT BOOTS

- Air exhaust through the handle
- Suitable for all universal car axle boots (soft)
- Also suitable for all-wheel vehicles and small transporters
- For drive shaft joint diameters from 25 - 110mm
- With 8 extremely robust spreader arms
- Spreading of the articulated arms by pneumatic
- Air pressure is regulated through a button
- No additional lubricant necessary
- With integrated safety valve
- Includes 1/4" coupling connector
- Light and robust design



Technical data:

max. Expansion diameter:	25 - 110 mm
Operating pressure:	max. 8 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

Width
mm

Length
mm



515.3100

200,0

450,0

2,27

99,⁹⁰ €

BRAKE PISTON RESET TOOL

PNEUMATIC SPINDLE FOR BRAKE PISTON ADAPTOR

- Ideally suited to damage-free resetting of the brake piston
- The turning direction is set by the user via the angle piece at the end of the spindle
- Automatic balancing of different thread slopes with the continuous spindle
- With universal pin adapter with magnetic spindle adapter plate
- Allows for a central resetting of the brake piston without tilting



79,50 €

	Length mm	3/8" Extension square adaptor	
150.2039	260,0	150.2041	2,85

PNEUMATIC SPINDLE FOR BRAKE PISTON ADAPTOR FOR CONFINED SPACES

- ideal for confined spaces due to optimised counter holding plate
- Ideally suited to damage-free resetting of the brake piston
- The turning direction is set by the user via the angle piece at the end of the spindle
- Comfortable and fast working through pneumatic spindle
- Whilst carrying out maintenance work and when changing the brake pads it is necessary to push the brake pistons back into the brake calliper



90,90 €

	Length mm	3/8" Extension square adaptor	
150.2237	260,0	150.2041	2,85

UNIVERSAL BRAKE PISTON RESET TOOL ADAPTER SET

**3
pcs**

- With individually adjustable 2-pin and 3-pin universal brake piston adapter and 3/8" adapter with magnet
- Ideally suited to damage-free resetting of the brake piston
- No damage to sleeves, pistons of piston holes in the brake calliper
- Whilst carrying out maintenance work and when changing the brake pads it is necessary to push the brake pistons back into the brake calliper
- can be combined with conventional brake piston restorers



52,50 €

150.2295	3 pcs		392
-----------------	-------	--	-----

UNIVERSAL BRAKE PISTON RE-SETTER TOOL SET WITH PNEUMATIC SPINDLE

**3
pcs**

- With individually adjustable 2-pin and 3-pin universal brake piston adapter
- Ideally suited to damage-free resetting of the brake piston
- The turning direction is set by the user via the angle piece at the end of the spindle
- Comfortable and fast working through pneumatic spindle
- Whilst carrying out maintenance work and when changing the brake pads it is necessary to push the brake pistons back into the brake calliper



157,50 €



150.1925	3 pcs		1,66
-----------------	-------	--	------

AIR HOSE



PU AIR SPIRAL COILED HOSE

- Flexible, crush resistant polyurethane hose
- Tube ends with anti kink device
- Rotating fitting
- Flexible in cold
- Oil and petrol resistant

Technical data:

Temperature constancy: -40°C - +70°C
Max. pressure: 12 bar

	Tube Ø mm	Connection	Hose length in m	Suitable coupling	Suitable plug nipple	kg	
515.3330	6	G1/4" OT	8,0	515.3483	515.3492	0,60	€ 24,⁹⁰
515.3335	8	G1/4" OT	15,0	515.3483	515.3492	1,20	€ 34,⁹⁰
515.3340	10	G3/8" OT	15,0	515.3484	515.3493	1,80	€ 39,⁹⁰

PU-PNEUMATIC TUBE

- High quality pneumatic hose
- Suitable for pneumatic and water
- Light and crush free material
- Long service life
- Oil and petrol resistant

Technical data:

Temperature constancy: -40°C - +70°C
Max. pressure: 15 bar



	Ø mm	Connection	Hose length in m	Suitable coupling	Suitable plug nipple	kg	
515.3344	6 x 9	G1/4" OT	20,0	515.3483	515.3492	1,00	€ 66,⁵⁰
515.3345	9 x 12	G1/4" OT	20,0	515.3483	515.3492	1,75	€ 79,⁵⁰

AIR HOSE WITH SIGNAL FLUORECENT COLOUR

- more flexible pneumatic hose
- Light and crush free material
- the fluorescent colour of Signal hose is easily detectable and prevents tripping
- abrasion-resistant
- Oil and petrol resistant



Technical data:

Temperature constancy: -40°C - +65°C
Max. pressure: 20 bar

29,⁹⁰ €

	Tube Ø mm	Hose length in m	Suitable coupling	Suitable plug nipple	kg
515.3420	10,0	10,0	515.3487	515.3496	3,00

AUTOMATIC AIR HOSE REEL Ø 10 MM X 15 M

- With wall mounting bracket
- For pneumatic and water
- Drum 180° freely tiltable by means of wall mounting
- Automatic hose return
- Impact resistant plastic housing

3/8"



119,⁹⁰ €

	Tube Ø mm	Hose length in m	kg
515.3440	10,0	15 + 1,5	7,02

AUTOMATIC AIR HOSE REEL Ø 13 MM X 15 M

- With wall mounting bracket
- For pneumatic and water
- Drum 180° freely tiltable by means of wall mounting
- Automatic hose return
- Impact resistant plastic housing

1/2"



179,⁹⁰ €

	Tube Ø mm	Hose length in m	kg
515.3445	13,0	15 + 1,5	10,20

AIR SERVICE UNIT

PNEUMATIC WATER TRAP

- For separating condensation
- Assembly directly in the access direction
- Made out of sintered metal



1/4"

29,90 €

	Size outside thread	Size internal thread	Spanner width mm	Length mm	
515.3370	1/4"	1/4"	14	88,0	140

PNEUMATIC SIDE OILER

- For automatic oiling of pneumatic tools
- To test oil state through transparent visibility glass
- Compact execution
- Extends the service life of pneumatic tools
- Assembly directly in the access direction



1/4"

16,50 €

	Size outside thread	Size internal thread	Spanner width mm	Length mm	
515.3360	1/4"	1/4"	17	54,0	110

PNEUMATIC PRESSURE REDUCER OF MAXIMUM 10 BAR TO 6.2 BAR

- Regulates the air flow volume and protects pneumatic tools
- Can be installed in the pneumatic line or directly to the pneumatic device
- Maximum input pressure 10 bar
- Output pressure is 6.2 bar
- Includes 1/4" coupling connector and adapter



1/4"



79,50 €

	Ø mm	Length mm	
515.3366	48	62,0	142


AIR SERVICE UNIT

- Suitable for wall mounting
- Consists of filter pressure reducer, oil regulator and manometer
- For the assembly of pneumatic tools
- Output pressure regulates independent of the input pressure
- Filters dirt particles and condensation



Technical data:

Max. pressure:	16 bar
Max. working pressure:	12 bar
Pressure gauge:	0,5 - 12 bar
Allowable temperature range:	-10° - +55°C
Air pressure up to 6,3 bar:	1/4" = 1800 l/min 3/8" = 5000 l/min 1/2" = 5000 l/min
Filter pressure more inferior:	1/4" = 30 ml 3/8" = 50 ml 1/2" = 50 ml
Oil trap:	1/4" = 40 ml 3/8" = 170 ml 1/2" = 170 ml




	Connection	B mm	L1 mm	L2 mm		
515.3355	1/4"	140,0	200,0	135,0	0,43	€ 104,90
515.3350	3/8"	140,0	200,0	135,0	1,14	€ 118,90
515.3356	1/2"	140,0	200,0	135,0	1,30	€ 145,50

PNEUMATIC ADAPTERS & COUPLINGS

METAL BALL JOINT FITTING NIPPLE

- Prevents damage to the pneumatic hose
- 360° rotatable and 30° angleable
- for pneumatic hoses 1/4" male thread
- Ideal for use with spray guns
- Diameter 7,2 mm



1/4"

16,50 €



	Size outside thread	Spanner width mm	Length mm	
515.3395	1/4"	21	56,0	50

METAL BALL JOINT FITTING NIPPLE

- Prevents damage to the pneumatic hose
- Joint absorbs pivoting movements when used with spray gun
- 360° rotatable and 30° angleable
- for pneumatic hoses 1/4" female thread
- Diameter 7,2 mm



1/4"

11,90 €

	Size internal thread	Spanner width mm	Length mm	
515.3394	1/4"	16	46,0	30

METAL AIR INLET CONNECTOR

- for pneumatic hoses 1/4" male thread
- Steel body
- Surface nickel-plated
- Diameter 7,75 mm

Application range: Germany (Standard), Austria, Slovenia, Hungary, China, India, Portugal, Russia, Poland, Romania, Turkey



1/4"


6,50 €

	Size outside thread	Spanner width mm	Length mm	
999.9086	1/4"	15	40,0	23

METAL AIR INLET CONNECTOR WITH HOSE TAIL

- For pneumatic hoses 10 mm
- Steel body
- Surface nickel-plated

Application range: Germany (Standard), Austria, Slovenia, Hungary, China, India, Portugal, Russia, Poland, Romania, Turkey




6,50 €

	D1 mm	D2 mm	L mm	
999.9093	10,0	7,6	45,0	15

METAL AIR INLET CONNECTOR WITH HOSE TAIL

- For pneumatic hoses 10 mm
- Steel body
- Surface nickel-plated

Application range: Switzerland, Holland, Belgium, France




6,50 €

	D1 mm	D2 mm	L mm	
999.9094	10,0	7,6	58,0	26

METAL AIR INLET CONNECTOR WITH HOSE TAIL

- For pneumatic hoses 10 mm
- Steel body
- Surface nickel-plated

Application range: Italy, Spain




6,50 €

	D1 mm	D2 mm	L mm	
999.9095	10,0	4,9	58,5	26

MALE COUPLING WITH MALE THREAD

- Body made of brass
- Diameter 7,2 mm



	Size outside thread	Spanner width mm	Length mm		
515.3489	1/4"	17	33,0	20	€ 4,50
515.3490	3/8"	19	33,0	25	€ 4,50
515.3491	1/2"	24	35,0	41	€ 6,50

2-LEVEL PNEUMATIC SAFETY COUPLING WITH HOSE NOZZLE

- 2-level safety removal function
- Stage 1: Pneumatic device is depressurised
- Stage 2: Pneumatic hose can be safely uncoupled
- Size 19
- Diameter 7,0 mm



	Ø mm	Spanner width mm	Length mm		
999.9096	9,0	19	95,0	52	€ 18,50
999.9097	11,0	19	96,0	54	€ 18,50
999.9098	14,5	19	98,0	62	€ 18,50

METAL AIR INLET CONNECTOR

- for pneumatic hoses 1/4" male thread
- Steel body
- Surface nickel-plated
- Diameter 7,75 mm

Application range: Switzerland, Holland, Belgium, France

1/4"



6,50 €

	Size outside thread	Spanner width mm	Length mm	
999.9087	1/4"	15	44,0	23

METAL AIR INLET CONNECTOR

- for pneumatic hoses 1/4" male thread
- Steel body
- Surface nickel-plated
- Diameter 7,75 mm

Application range: Italy, Spain

1/4"



6,50 €

	Size outside thread	Spanner width mm	Length mm	
999.9088	1/4"	15	45,0	23

METAL AIR INLET CONNECTOR

- for pneumatic hoses 1/4" male thread
- Steel body
- Surface nickel-plated
- Diameter 7,75 mm

Application range: South Korea, China, Japan

1/4"



6,50 €

	Size outside thread	Spanner width mm	Length mm	
999.9089	1/4"	15	40,0	25

2-STAGE PNEUMATIC SAFETY COUPLING

- With one handed operation
- 2-level safety removal function
- Stage 1: Pneumatic device is depressurised
- Stage 2: Pneumatic hose can be safely uncoupled
- Self sealing on the coupling
- Diameter 7,0 mm




1/4"

18,50 €

	Size outside thread	Spanner width mm	Length mm	
999.9092	1/4"	4,9	77,5	54

COUPLING WITH MALE THREAD

- With one handed operation
- Self sealing on the coupling
- Body made of brass
- Diameter 7,2 mm

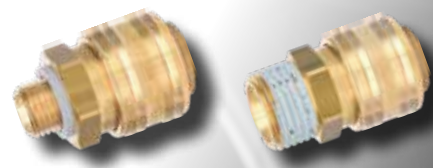

	Size outside thread	Spanner width mm	Length mm		
515.3480	1/4"	22	40,0	70	€ 8,50
515.3481	3/8"	22	41,0	90	€ 8,50
515.3482	1/2"	22	43,0	90	€ 8,50

BRASS COUPLING WITH FEMALE THREAD

- Self sealing on the coupling
- Unilaterally closing off
- Body made of brass
- Diameter 7,2 mm



	Size internal thread	Spanner width mm	Length mm		
515.3483	1/4"	22	41,0	80	€ 8, ⁵⁰
515.3484	3/8"	22	41,0	85	€ 8, ⁵⁰
515.3485	1/2"	24	43,0	90	€ 8, ⁵⁰

BRASS MALE COUPLING WITH FEMALE THREAD


- Body made of brass
- Diameter 7,2 mm



	Size internal thread	Spanner width mm	Length mm		
515.3492	1/4"	17	33,0	22	€ 4, ⁵⁰
515.3493	3/8"	19	33,0	22	€ 4, ⁵⁰
515.3494	1/2"	24	35,0	40	€ 7, ⁵⁰



BRASS REDUCING NIPPLE

- Body made of brass
- Diameter 7,2 mm

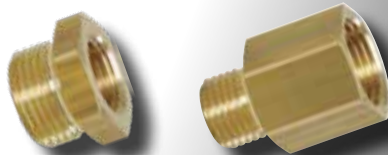

MALE COUPLING WITH HOSE CONNECTOR

- Body made of brass



	D1 mm	D2 mm	L mm		
515.3495	6,0	7,2	44,0	10	€ 3, ⁵⁰
515.3496	9,0	7,2	44,0	20	€ 4, ⁵⁰
515.3497	13,0	7,2	46,0	25	€ 4, ⁵⁰

BRASS COUPLING WITH HOSE CONNECTOR

- With one handed operation
- Roller locking
- Check valve
- Body made of brass



	Ø mm	Length mm		
515.3486	6,0	55,0	70	€ 8, ⁵⁰
515.3487	9,0	55,0	80	€ 8, ⁵⁰
515.3488	13,0	55,0	90	€ 8, ⁵⁰

BRASS REDUCING NIPPLE

- Body made of brass
- Diameter 7,2 mm



	Size outside thread	Spanner width mm	Length mm		
515.3380	1/4"	17	23,0	20	€ 4, ⁵⁰
515.3381	3/8"	19	23,0	30	€ 4, ⁵⁰
515.3382	1/2"	24	30,0	50	€ 7, ⁵⁰

BRASS PNEUMATIC REGULATOR

- With regulation wheel
- For regulating the air flow volume
- Assembly directly in the access direction
- Completely lockable
- Body made of brass



	Size outside thread	Size internal thread	Spanner width mm	Length mm		
515.3383	3/8"	1/4"	19	14,0	10	€ 4, ⁵⁰
515.3384	1/4"	3/8"	24	26,0	30	€ 6, ⁵⁰
515.3385	3/8"	1/2"	24	26,0	50	€ 7, ⁵⁰
515.3386	1/2"	3/8"	19	18,0	60	€ 4, ⁵⁰

1/4" **16,⁵⁰ €**

	Size outside thread	Size internal thread	Spanner width mm	Length mm		
515.3365	1/4"	1/4"	18	43,0	80	

BRASS PNEUMATIC 3 WAY SEPARATOR

- Connection of 3 outlet lines 1/4" female thread to one inlet line
- Body made of solid brass




1/4" **18,⁵⁰ €**

	Size internal thread	Spanner width mm	Length mm		
515.3375	1/4"	19	32,0	160	

BRASS HOSE NIPPLE WITH MALE THREAD

- Inner cone 45°
- Body made of brass



	Size outside thread	Ø mm	Spanner width mm	Length mm		
515.3387	1/4"	6,0	17	35,0	20	€ 4, ⁵⁰
515.3388	1/4"	9,0	17	35,0	20	€ 4, ⁵⁰
515.3389	3/8"	9,0	19	36,0	30	€ 4, ⁵⁰
515.3390	3/8"	13,0	19	42,0	30	€ 6, ⁵⁰
515.3391	1/2"	9,0	24	40,0	50	€ 7, ⁵⁰
515.3392	1/2"	13,0	24	46,0	50	€ 8, ⁵⁰

OILS & GREASES

PNEUMATIC TOOL OIL

- For the lubrication of pneumatic tools
- With lockable nozzle

	Volume in ml		
515.3361	100	250	€ 7, ⁵⁰
515.3362	1000	1100	€ 21, ⁵⁰



PREMIUM PRODUCTS PREMIUM SERVICE



MONSTER

With our
AFTERSALES SERVICE CENTER
competent support - even after purchase.

Quality assurance in accordance with DIN EN ISO 9001:2015
and controlled safety at the highest stage!



Your Local Distributor



KS Tools Werkzeuge - Maschinen GmbH

Seligenstädter Grund 10 - 12
D-63150 Heusenstamm

GERMANY

Tel.: +49(0) 61 04 49 74-0
Fax: +49(0) 61 04 49 74-11
e-mail: aftersales@kstools.com
www.kstools.com



*This is an limited special price offer - only until stocks last.
All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2024